


Custom Engineered Solutions for Tomorrow

www.standexmeder.com

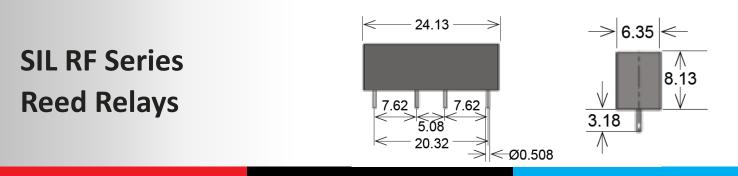

- Features: Radio Frequency Single In-Line Relay up to 1.5 GHz, Coax Screen for Z = 50 Ohm Impedance
- > Applications: In-Circuit Tester, High Frequency Applications & Others
- Markets: Telecommunication, Security, Test and Measurement & Others

| Part Description: SIL 00 - 1 A 72 - 74 X | | | | | |
|--|-------------|-----------------|--------------|---------|--------|
| | | | | | |
| | | | | | |
| Nominal Voltage | Contact QTY | Contact Form | Switch Model | Pin Out | Option |
| 05, 12 | 1 | A | 72 | 74 | D, L |

| Customer Options | Switch Model | Unit |
|---|------------------|------|
| Contact Data | 72 | Unit |
| Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s | 10 | W |
| Switching Voltage (max.) DC or peak AC | 200 | V |
| Switching Current (max.) DC or peak AC | 0.4 | А |
| Carry Current (max.) DC or peak AC | 0.5 | А |
| Contact Resistance (max.) @ 0.5V & 50mA | 150 | mOhm |
| Breakdown Voltage (min.) According to EN60255-5 | 0.23 | kVDC |
| Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage | 0.6 | ms |
| Release Time (max.) Measured with no Coil Excitation | 0.1 | ms |
| Insulation Resistance (typ.) Rh<45%, 100V Test Voltage | 10 ¹⁰ | Ohm |
| Capacitance (typ.) @ 10kHz across open Switch | 0.2 | pF |



USA: +1 Europe: +4 Asia: +8

+1.866.782.6339 +49.7731.8399.0 +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com



Custom Engineered Solutions for Tomorrow

A Global Leader in the Design, Development, and Manufacture of Sensor and Magnetic Components

Series Datasheet – SIL RF Reed Relays

www.standexmeder.com

| Coil Data | | Coil Voltage | Coil Resistance | Pull-In Voltage | Drop-Out Voltage | Nominal Coil Power |
|-----------------|-----------------|--------------|-----------------|-----------------|------------------|--------------------|
| Contact Form | Switch Model | (nom.) | (typ.) | (max.) | (min.) | (typ.) |
| Ur | nit | VDC | Ohm | VDC | VDC | mW |
| 1.0 | 72 | 05 | 500 | 3.5 | 0.75 | 50 |
| 1A | 72 | 12 | 1,000 | 8.4 | 1.8 | 144 |
| | | | | | | |

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

| Environmental Data | Unit | |
|--|-----------|----|
| Shock Resistance (max.) 1/2 sine wave duration 11ms | 50 | g |
| Vibration Resistance (max.) | 20 | g |
| Operating Temperature | -20 to 70 | °C |
| Storage Temperature | -35 to 95 | °C |
| Soldering Temperature (max.) 5 sec. max. | 260 | °C |

Handling & Assembly Instructions


- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay.
 Protective circuits need to be used.
- External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.
- Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

| Glossary Contact Form | | | | |
|-----------------------|--|--|--|--|
| Form A | NO = Normally Open Contacts SPST = Single Pole Single Throw | | | |
| Form B | NC = Normally Closed Contacts SPST = Single Pole Single Throw | | | |
| Form C | Changeover SPDT = Single Pole Double Throw | | | |





*Load increase reduces life expectancy of Reed Switches

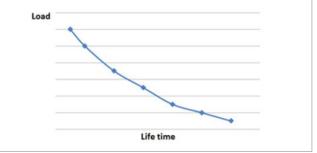






+1.866.782.6339 +49.7731.8399.0 +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com



Custom Engineered Solutions for Tomorrow A Global Leader in the Design, Development, and Manufacture of Sensor and Magnetic Components

Series Datasheet – SIL RF Reed Relays

www.standexmeder.com

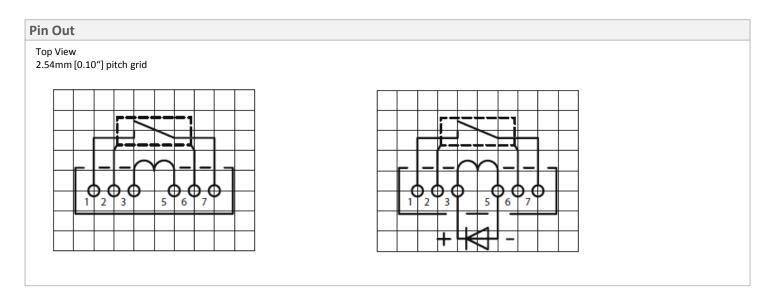



+1.866.782.6339 +49.7731.8399.0 +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com