

MDE Series

Molding Power Inductors

Size 0650




FEATUERS

- High rated current
- Frequency up to 3 MHz
- 125 °C maximum total temperature operation
- Low core loss
- Ultra low buzz noise due to molding construction
- Halogen Free & ROHS compliant
- Quantity: 1000pcs


APPLICATION

- Laptops and PCs
- Switch and servers
- Base stations
- DC/DC converters
- Battery powered devices
- SSD modules

Dimensions: [mm]

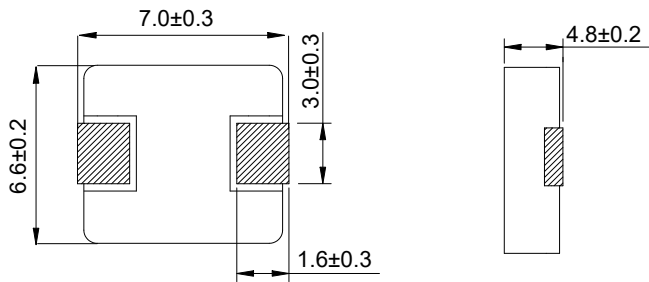

Land Pattern: [mm]



Electrical Properties:

Part No.	L@100KHz /1V (μH)	Tolerance	R _{DC} Max. (mΩ)	I _{ast} Typ. (A)	I _R Typ. (A)
MDE0650-R47M	0.47	±20%	3.9	21.0	20
MDE0650-R68M	0.68	±20%	4.5	18.0	16.5
MDE0650-1R0M	1.0	±20%	6.6	16.0	12
MDE0650-1R5M	1.5	±20%	10	13.0	9.5
MDE0650-2R2M	2.2	±20%	12.5	11.0	9
MDE0650-3R3M	3.3	±20%	22.0	10.0	8.5
MDE0650-4R7M	4.7	±20%	29	8	6
MDE0650-6R8M	6.8	±20%	41	6.3	5.8
MDE0650-8R2M	8.2	±20%	48	5.5	5.5
MDE0650-100M	10	±20%	60	5.3	4.5
MDE0650-150M	15	±20%	90	4.0	3.1

Part No.	L@100KHz /1V (μ H)	Tolerance	R _{DC} Max. (m Ω)	I _{last} Typ. (A)	I _R Typ. (A)
MDE0650-220M	22	$\pm 20\%$	140	3.5	2.6
MDE0650-330M	33	$\pm 20\%$	190	3.0	2.3
MDE0650-470M	47	$\pm 20\%$	230	2.6	2.0

Operating temperature range - 55 °C to + 125 °C

I_R will cause the coil temperature approximate $\Delta T 40$ °C

I_{sat} will cause to drop approximately 30 %