WATER PROOF SWITCHES

DIMENSIONS

Unless otherwise specified, a tolerance of ±0.4mm applies to all dimensions

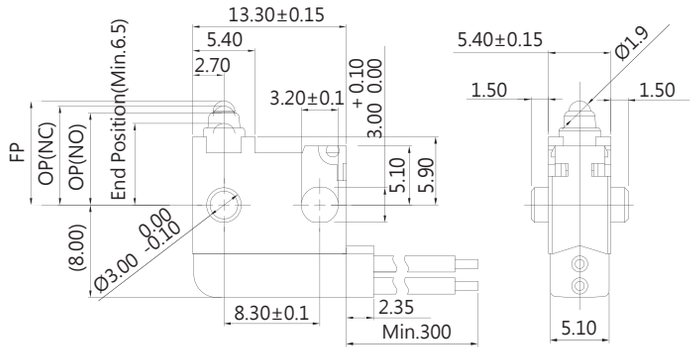

DW3 (IP67) SERIES

APPLICATION

Automobiles
(detection of door opening and closing and shift lever postion, etc.)
Household appliances
(propane stoves,vacuum cleaners, air conditioners Washing machines, etc.)

ORDERING INFORMATION

D W 3 — G 1 S — 0 0 A 0 — M F 0 0 1 A — Z

SERIES PREFIX	CODE	RATING CURRENT
	P1	0.1A 30VDC 0.05A 16VDC 0.001A 5VDC Contact Plated Sliver
	G1	0.1A 30VDC 0.05A 16VDC 0.001A 5VDC Contact Plated Gold

CODE	OPERATING FORCE
S	STANDARD

CODE	ACTUATOR TYPE
00	
A01	

CODE	PILLAR TYPE
A	
B	
C	

CODE	CIRCUIT ARRANGEMENT
0	S.P.D.T
1	S.P.S.T-NO
2	S.P.D.T-NC

NOTE: S.P.D.T only for bottom side

CODE	AWG TYPE
M	0.3mm²

CODE	UL NUMBER
F	AVSS

SERIAL CODE

0	
R	
L	

SPECIAL CODE

ROHS CODE

DIMENSIONS



CODE	L1	H	ØA	ØB	ØC	ØD	P
A	1.5	5.9	3.0	HOLE 3.2	HOLE 3.0	N/A	8.3
B	5.0	5.9	2.2	2.2	2.6	2.6	8.3
C	1.5	5.9	3.0	3.0	N/A	N/A	8.3